

X15CE

POINT SOURCE
15" COAXIAL ACTIVE
SPEAKER SYSTEM

Xcellence



Just the beautiful sound and versatility of the X12CE, also in a compact format, but with deeper low end. From 44 Hz to 20 kHz, you will hear low frequencies tuned to perfection. A little more of low-end for a chunkier sound!

La misma calidad sonora y versatilidad de la X12CE, también en un formato compacto, pero con graves más intensos. Desde 44 Hz a 20 kHz, oirás las bajas frecuencias sintonizadas hasta la perfección. ¡Un poco más de graves para un sonido más robusto!

X15CE

POINT SOURCE 15" COAXIAL ACTIVE SPEAKER SYSTEM

Xcellence



COAXIAL
SPEAKER



> 250 V
Overvoltage
Protection



WITH CWK-D




DSP STUDIO CONTROL APP
FOR IPAD & WINDOWS


TECHNICAL FEATURES

Amplifier (program power)	800 W (LF) + 200 W (HF) – Class D Bi-amplified
Input sensitivity	8 dBu – 1.94 V
Input Impedance	20 kΩ Balanced
Mains	Universal Switch Mode Power Supply 85-265 V / 45-65 Hz
Average current draw	1.3 A (Heavy duty musical program)
SPL (1 m)	127 dB continuous, 130 dB Peak
Built-in DSP	48 bit
AD/DA converters	24 bit – 96 kHz
Presets	FACTORY / NEARFIELD / SPEECH / MONITOR / XOVER + 23 configurable user memories
Frequency response (-10 dB)	44 Hz – 20 kHz
Components	Coaxial transducer LF 15" Neodymium woofer (3" voice coil) HF 3" Titanium diaphragm Neodymium driver
Directivity (HxV)	80° Conical
Weight	25.9 kg
Finish	Multilayer Baltic birch plywood Front steel grille with grey micro-foam cloth High resistant black matt Polyurea paint


FREQUENCY RESPONSE 1w/1m (FACTORY PRESET)

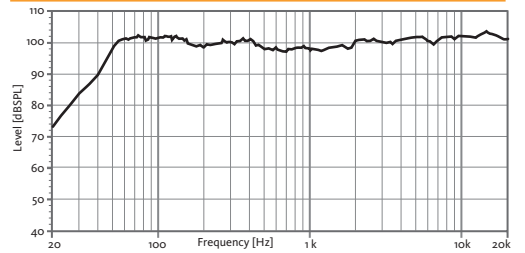

HORIZONTAL COVERAGE, 0°

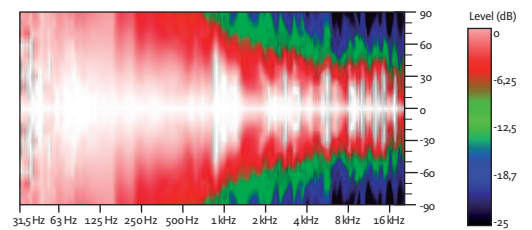

VERTICAL COVERAGE, 0°

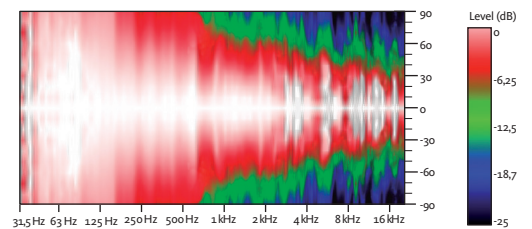

STAGE MONITOR APPLICATION



REAR VIEW

ACCESSORIES



FC-X15CE



UB-X15



GT-50



SC-15X



ACR-M10



SP/CR



CWK-D