

The flagship of the NITID series: a versatile line array equipped with the exclusive Amate Audio waveguide, ideal for all kind of live events. Our custom rigging design and optimised factory presets ensure a fast and easy deployment of the system. Great sound in a matter of minutes!

KEY FEATURES

TRANSDUCERS TECHNOLOGY

Two-way line array active speaker system composed by two direct radiating 2,5-inch voice coil, neodymium magnet 8" loudspeakers and two 1,75-inch voice coil diameter, PEN diaphragm, neodymium magnet compression drivers coupled to a 110° x 11° exclusive high performance aluminium waveguide.

AMPLIFICATION

Each N208 system is constructed in multiples of two modules: one active unit N208, which includes the amplification and the digital signal processor (DSP) and one passive unit N208P, which is driven by the N208.

1500 W 3rd generation Class D built-in amplifier controlled by a dedicated DSP.

90% efficiency amplifier SMPS (switching mode power supply), allowing maximum power delivery with minimum consumption in an extremely low-weight and reduced size.

Rear connections and control panel with LCD screen to display the different settings, presets, volume and adjustments done by the user. Our SensitiveTouch® capacitive sensor keypad guarantees the reliability of the system even under humidity and extreme weather conditions.

d delay, limiter, gain control, mute, input dynamic compressor) as well

as several useful presets to adjust N208 to different requirements. The on-screen output power display helps to easy monitor the system

Internal DSP with all necessary signal processing (crossovers, EQ's,

ECO Mode available.

DSP & CONTROL

5-band EQ menu with five parametric equalizers.

DESIGN & ACCESSORIES

Ergonomic handles for an easy handling.

1.5mm speaker grilles with black mesh, exclusively designed with an optimum perforation gradient and attractive appearance.

Multilayer birch plywood cabinet with Polyurea® coating, offering maximum reliability and strength for touring as well as for high demanding applications.

Several accessories allow easy flying and stacking.

Double PowerCon® (input & link).





2x 8" TWO-WAY ACTIVE LINE ARRAY SPEAKER SYSTEM



Amplifier (program)		1000 W (LF) + 500 W (HF) – Class D Bi-amplified
Input Sensitivity		8 dBu – 1.94 V
Input Impedance		20 kΩ Balanced
Maximum input level		20 dBu
Mains		Universal Switch Mode Power Supply 85-265 V / 45-65 Hz
Average current draw		2.1 A (Heavy duty musical program)
SPL (1 m)		129 dB continuous musical program, 132 dB peak
Built-in DSP		48-bit. Includes factory presets
AD/DA converters		24 bit – 48 kHz
Standby mode consumpt	tion	< 5 W
Adjustable delay line		118 ms / 40 m
Crossover frequency		1k1Hz
Frequency response (-10) dB)	78 Hz - 18 kHz
Components	LF - MF HF	2x 8" neodymium woofers (2.5" voice coil) 2x 1.75" PEN diaphragm, neodymium magnet compression drivers
Directivity (HxV)		110° × 11°
Directivity factor (Q)		31
Directivity Index (DI)		15 dB
Weight		23 kg (N208) / 21 kg (N208P)
Dimensions (HxWxD)		279 x 684 x 522 mm (no pins included)
Finish		Multilayer birch plywood with high resistant black Polyurea® coating
Grille		1.5 mm steel with black acoustic mesh
Rigging		Stainless-steel integrated rigging bars
Connectors		1 x XLR input / 1x XLR link / 1x AC PowerCon [®] input / 1x AC PowerCon [®] link / 1x Speakon NL4FX output (N208) 1x Speakon NL4MPR input (N208P)





CONTROL PANEL

Our latest digital signal processing (DSP) is integrated with 3rd generation Class D amplification and operated via our dedicated SensitiveTouch™ keypad technology. With no mechanical components or moving parts, the SensitiveTouch™ capacitive sensor keypad is highly responsive, weatherproof and durable compared with conventional electronic controls and effectively failsafe. With the SensitiveTouch™ keypad and display, you can set-up the N208 in just seconds.



SIDE VIEW



FRONT VIEW WITHOUT GRILLES





TOP VIEW

REAR SET VIEW





2x 8" TWO-WAY ACTIVE LINE ARRAY SPEAKER SYSTEM



BUILT-IN PRESETS

2BOX FR

8BOX FR

6 $\overline{0}$

-6,25

-12,5

-18,7

For eight units N208 without subwoofer

С

C

C

0


2BOX_SW For two units N208 For two units N208 without subwoofer with subwoofer


4BOX_FR For four units N208 without subwoofer

 $\left[0 \right]$




8BOX SW For eight units N208 with subwoofer 4BOX_SW For four units N208 with subwoofer














FREQUENCY RESPONSE 1w/1m (4BOX FR PRESET) ONE CABINET



HORIZONTAL COVERAGE




VERTICAL COVERAGE




31,5Hz 63Hz 125Hz 250Hz 500Hz 1kHz 2 kHz 4 kHz 8 kHz 16 kHz


HORIZONTAL & VERTICAL BEAMWIDTH (-6dB point)



DIRECTIVITY INDEX (DI)



CAD DRAWING SCHEME

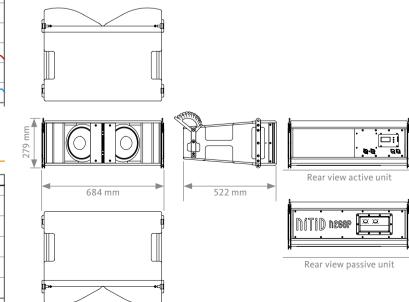

www.amateaudio.com






2x 8" TWO-WAY ACTIVE LINE ARRAY SPEAKER SYSTEM



N208 SET







N208 ACTIVE MODEL




EL N208P PASSIVE MODEL

STACKING N208 WITH N18W FR-208R

STACKING N208 WITH N218W FR-208R



FLYING N208 WITH N18W TA-X208R + KR-18T





ACCESSORIES

FLIGHT CASE FC-N208 for four units of N208





TA-X208R for flying N208



STACKING FRAME

FR-208R for N208 over N18W



DISCOVER NÍTID

UNIQUE DESIGN

Distinguishing details include the speaker grille, exclusively designed for an attractive appearance, maximum protection, and with **the best perfo**ration coefficient in the market, for improved sound quality. The Polyurea® finish offers durable protection for the birch-ply cabinet, and electronic circuits and controls are smartly protected against moisture. A wide range of accessories is provided for whatever your application is.

THE PERFECT BALANCE

NÍTID series is the culmination of an intensive program of research, development and optimization, to achieve the greatest possible power and performance from the most compact sized cabinet. Every aspect of its form factor has resulted from examination and consideration of optimum acoustic response, ergonomics, construction and appearance.

AMAZING PERFORMANCE

The integrated **'plug & play'** active power and control system includes DSP presets for rapid setup and amazing sound, and the comprehensive control interface includes instantly recallable presets for setting up the **NÍTID** in just a few seconds. The accurate match between transducers, DSP and amplifiers provide a fully optimized system for the most demanding applications.





