

# S15W

2000 W  
1x 15" ACTIVE  
SELF-POWERED  
SUBWOOFER

# NiTiD-S



INTEGRATED POWER & CONTROL WITH MULTIPLE PRESETS



INTEGRATED CARDIOID PRESETS



REAR PANEL TOUCHSCREEN GUI OPERATION



HIGH RESISTANCE POLYUREA® FINISH



M8 FLYING POINTS

Bridging the gap between compact and powerful, the S15W combines the portability and ergonomomy of the S12W with the extended low-frequency performance of the S18W. Featuring a finely tuned 15" neodymium woofer, custom-developed exclusively for this enclosure, the S15W delivers impactful bass response with a frequency extension that strikes the perfect balance.

## KEY FEATURES

### TRANSDUCER TECHNOLOGY

Active subwoofer comprising a direct radiating 4-inch voice coil, 15" neodymium magnet loudspeaker front loaded in a bass-reflex tuned enclosure with laminar ports.

### AMPLIFICATION

Onboard 2000 W 3rd generation Class D amplification.

Universal switch mode power supply (SMPS) with Power Factor Correction (PFC), allowing constant power delivery from 85 to 265 VAC input and high efficiency (>90%), with extremely compact lightweight form factor.

Automatic EcoMode low power consumption mode when no signal input present.

Connectors mounted on an inclined, recessed moulded connector plate for improved security and environmental protection.

Double PowerCon® connectors (input & link).

### ADVANCED DSP SYSTEM CONTROL

Onboard 64-bit precision DSP loudspeaker system control manages amplifier gain and cross-over settings, peak and thermal limiters and mutes. Includes adjustable 294 ms / 100 m delay line for extensive alignment delay and 5-band fully configurable parametric EQ.

High-order FIR filtering ensures fully phase coherent PEQ adjustment and absolute phase alignment of common cabinet couplings.

Extensively R&D'd factory presets provide instantaneous system configuration for common applications, including cardioid presets. A default preset perfectly phase aligns the subwoofer with any of the S-series active two-way systems.

Operation and monitoring of system parameters, presets and user-adjustments is via Amate Audio's unique rear-panel 3.5" TFT colour touchscreen GUI.

### DESIGN & ACCESSORIES

Recessed ergonomic carry handles.

Exclusive 2mm black mesh speaker grilles with optimum perforation gradient and aesthetic appearance.

Multilayer birch plywood cabinet with Polyurea® coating, providing maximum robustness and strength for touring, events production, venue installation and other highly demanding applications.

M20 plate socket provided at the top side for 2-way enclosure coupling.

M8 rigging points for easy flying.

# S15W

2000 W  
1x 15" ACTIVE  
SELF-POWERED  
SUBWOOFER


# Nítid-S



## TECHNICAL FEATURES

Amplifier (program)	2000 W Class D
Input sensitivity	2 dBu – 1 V
Input impedance	50 kΩ Balanced
Mains	Universal Switch Mode Power Supply 85-265 V/ 45-65 Hz
Average current draw	4.5 A (Heavy duty musical program)
SPL(1m)	129 dB musical program, 132 dB peak
Built-in DSP	64-bit processing unit. Includes factory presets
AD/DA converters	24 bit – 48 kHz
Standby mode consumption	4.8 W @230VAC
Adjustable delay line	294 ms / 100 m
Crossover frequency	80 Hz / 90 Hz / 100 Hz
Frequency Response (-10dB)	35 Hz – 140 Hz (LPF100)
Components (LF)	15" neodymium woofer (4" voice coil)
Directivity (-6dB)	Omnidirectional
Directivity factor (Q)	1
Directivity Index (DI)	0 dB
Weight	39.7 Kg
Dimensions (H x W x D)	463 x 630 x 680 mm
Finish	Multilayer birch plywood with high resistant black Polyurea® coating
Grille	2 mm powder coated steel with black acoustic mesh
Rigging	M8 points
Connectors	1x XLR input / 1x XLR link / 1x AC PowerCon® input / 1x AC PowerCon® link

## DISCOVER NÍTID

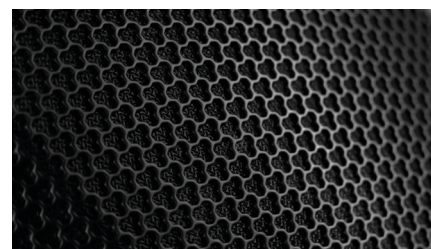

### UNIQUE DESIGN

New S-series models build on the success, innovation and best-in-class performance of the original Nítid designs with improved features including a recessed moulded connector plate, more highly stylised form factor and improved robustness of the world's most acoustically transparent pro-audio speaker grille.



### THE PERFECT BALANCE

An ongoing programme of research and development ensures that Nítid series loudspeakers continue to achieve the highest levels of output and performance from the most compact sized designs, in an unrivalled synthesis of engineering and aesthetic form.



SIDE VIEW



FRONT VIEW WITHOUT GRILLES



REAR VIEW



BOTTOM VIEW




TOP VIEW

## BUILT-IN PRESETS


### S-ALIGNED

LPF 90 Hz + All-pass (for Nitid-S enclosure coupling)

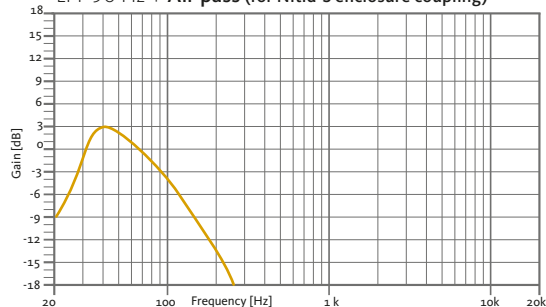


### LPF80

LPF 80 Hz

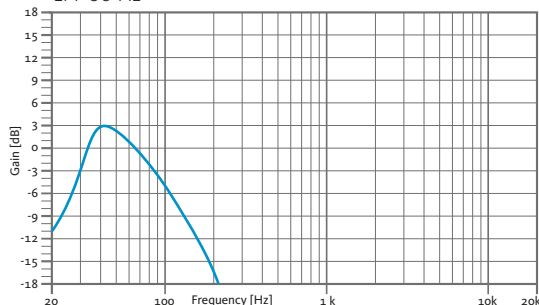


### LPF90

LPF 90 Hz

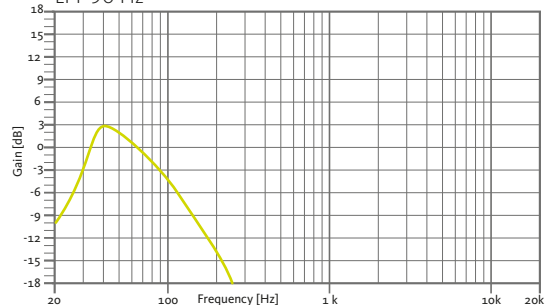


### LPF100


LPF 100 Hz

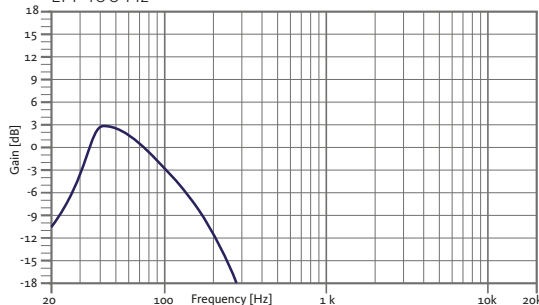

## FREQUENCY RESPONSE 1w/1m (LPF100 PRESET)

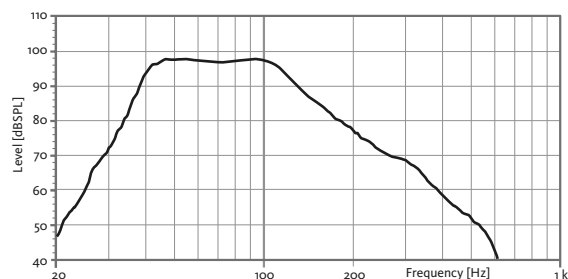


## CAD DRAWING SCHEME

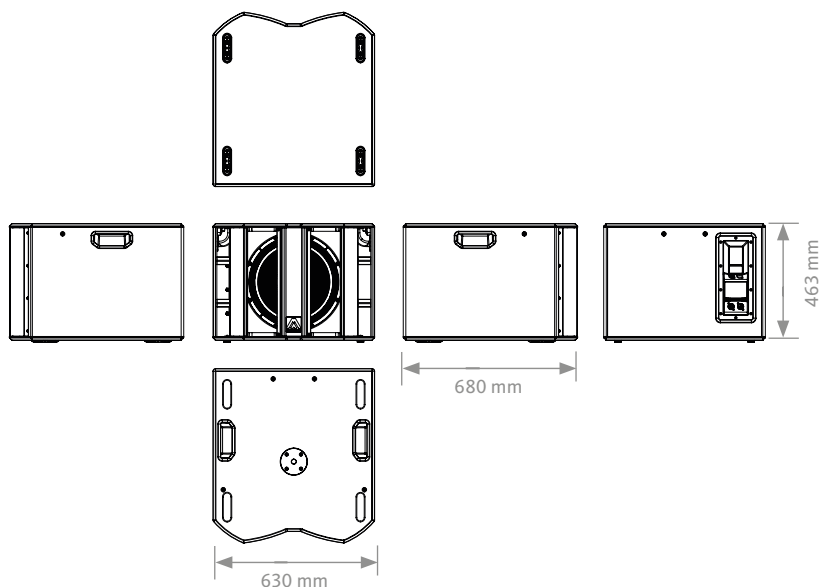

## EASY CARDIOID CONFIGURATION THROUGH DEDICATED PRESETS

63 Hz

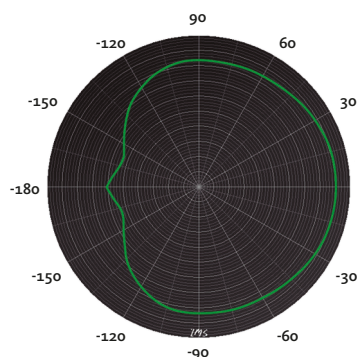

# S15W

2000 W  
1x 15" ACTIVE  
SELF-POWERED  
SUBWOOFER

# NíTiD-S



## ACCESSORIES

### SAFETY SLING

SC-15



### M8 RIGGING EYEBOLT

ACR-M8



### PROTECTION COVER

NC-S15W



### DISTANCE ROD M20

SP-CRTL

Ø: 35 mm

Length: 55 cm ~ 90 cm

Thread: M20



### TROLLEY TR-S15W

Wooden plate with reinforced wheels




## TOUCHSCREEN CONTROL




Amate Audio's latest generation DSP System management is integrated with 3rd generation Class D amplification. Colour touchscreen operation and monitoring of DSP System includes access to powerful presets - engineered by Amate Audio R&D team - that instantly configure your NíTiD loudspeaker for the majority of common application environments within seconds, prior to rigging or installation.

## RECOMMENDED SET-UP'S


S15W + S26

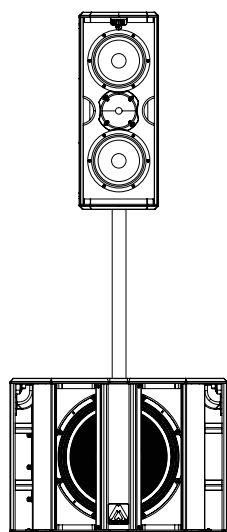

S15W + S10

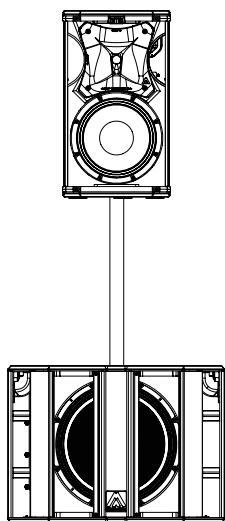

S15W + S12

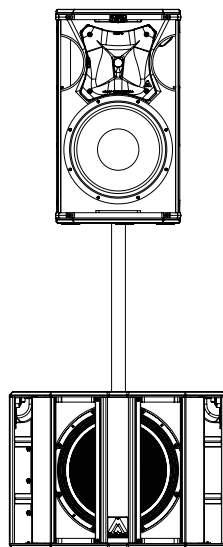

S15W + S46

